

# FMAKM2T

## M2T Antenna Kit

### Kit includes:




- (2) antenna cables
- (2) flat nuts
- (2) sealing washers, red
- (1) grommet
- (2) locking rings

The M2T transmitter occupies a half rack space, and comes with hardware to mount two (2) M2T transmitters into a rack. RMPM2T-1, a single rack mount kit, is also available. You will need the hardware that comes with these mounting kits to attach the FMAKM2T.



1. Begin by removing the flat nut, red sealing washer and locking ring (under red sealing washer) from both cables.

2. Replace only the red sealing washer on each cable. (Use a small screwdriver to accurately secure the red sealing washer.)
3. Insert the antenna cable hardware into the mounting bracket in the following order:

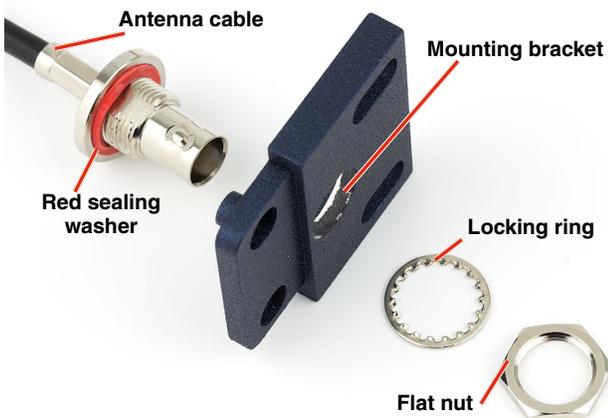

4. Attach antenna cable input into the back of the M2T.



5. Repeat steps 1-4 on other side of M2T.



6. The grommet is needed if you are only mounting a single M2T unit into a rack, using the single rack mount kit (RMPM2T-1). Cut through the grommet so you can place it around the antenna cable.

7. The grommet then fits inside the support bracket flange (Part #27076) as shown below. Orient your cut to face inside the support bracket slot.

