

DSSM

Digital Wireless Water-Resistant Micro Body Pack Transmitter

DSSM-A1B1, DSSM-B1C1, DSSM/E01-A1B1,
DSSM/E01-B1C1, DSSM/E07-941

IP57
Watertight



Fill in for your records:

Serial Number:

Purchase Date:

Table of Contents

Introduction.....	4
What Is IP57?	4
600 MHz Guard Band and the Duplex Gap.....	5
Battery Installation	5
Controls and Functions.....	6
Modulation LEDs	6
OLED Screen.....	6
BATT LED	6
MENU/SEL Button	6
Power Button	6
UP and DOWN Arrow Buttons.....	6
Encryption Status LCD/LED Indicator Modes.....	6
Turning LEDs ON and OFF	7
Connectors and USB Port	7
Attaching and Removing the Microphone	7
Operating Instructions	8
Powering On in Operating Mode.....	8
Powering On in Standby Mode	8
Encryption Key Missing.....	8
Powering Off	8
Setup Steps.....	9
Locking the Controls.....	9
Adjusting the Input Gain	9
Menu Map	10
Menu Screen Details	12
Input Menu	12
Adjusting Input Gain.....	12
Selecting the Low Frequency Roll-off	12
Selecting Mic/Audio Input Configuration	12
Xmit (Transmit) Menu	13
Selecting Frequency.....	13
Setting Transmitter Output Power	13
Rf On?	13
Compat Menu	14
Selecting the Compatibility Mode	14
HDM Mode (High Density Transmission).....	14
IR&Key Menu	14
SendFreq	14
SendAll	14
GetFreq	14
GetAll	14
KeyType	14
WipeKey.....	15
Setup Menu	15
Auto On	15
Remote.....	15
Locking/Unlocking Changes to Settings.....	15
DispOff	15
LED Off.....	15
Default.....	15
About.....	15
Microphone Wiring	16
Line Input Wiring and Use	16
Input Jack Configuration	16
IR (Infrared Sync)	16
Removeable Belt Clip.....	17
Whip Antennas.....	17
LectroRM.....	18
Firmware Update	19
Supplied Accessories/Optional Accessories.....	20
Specifications	21
Troubleshooting	22
Service and Repair	23
Returning Units for Repair.....	23
Self-help Options for Non-Urgent Concerns	23

Introduction

The DSSM is the enhanced, fully digital successor to the SSM, while being IP57 rated for moisture and particulate resistance and offering dock charging capability.

The DSSM is ideal in theater, TV, film and broadcast where concealment is desired and water-resistance is required. The DSSM offers an extensive feature set and performance packed into an exceptionally compact housing, compatible with all current Lectrosonics digital receivers, including the DSR, DSR4, DSQD, DCR822, M2Ra and DCHR.

The DSSM includes specially developed, highly efficient circuitry for extended operating time on the rechargeable LB-50 battery. RF power selections are offered at 10 and 35 mW (D2 compat mode) and a special high density (HDM) mode at 2 mW.

The servo bias input accepts mic or line level signals with a wide range of gain adjustment in 1 dB steps. Accurate indications on the display allow precise gain adjustments to be made for the maximum signal to noise ratio and minimum distortion. The limiter in the preamp can cleanly handle signal peaks over 30 dB above full modulation, allowing the input gain to be set high enough to achieve the maximum signal to noise ratio, yet provide protection against input overload.

The audio input jack is a common miniature 3-pin connector with a threaded collar adding additional ruggedness. An IR (infrared) port next to the SMA antenna mount allows transfer of frequency and compatibility mode settings.

The membrane switch panel and OLED display enable access to all adjustments and settings. The menu struc-

ture is easy to navigate. Battery status is indicated by a bi-color LED that is green with a fresh battery, then turns to red as the battery runs down, and finally starts blinking red when there are only a few minutes of runtime remaining.

The housing is constructed of machined aluminum alloy, treated in the conductive, super hard electroless nickel ebENi finish.

A flexible, repositionable wire belt clip (to orient the antenna facing up or down) is included.

The optional CHSDSSM battery charging station (*shown below*) provides a convenient and organized means of recharging up to 4 LB-50 batteries or DSSM transmitters in larger systems with numerous batteries in regular use. Each charging module may be daisy-chained to 3



What is IP57?



IP ratings indicate how resistant an electrical device is to water and common materials - like dirt, dust and sand.

The DSSM's IP57 rating indicates that that it is water resistant up to 1 meter (3.2 feet) for 30 minutes - perfect for your most demanding environments.



CAUTION: DO NOT REMOVE the threaded screw where indicated, as that will void the warranty and IP rating.

600MHz Wireless Guard Band and Duplex Gap

You'll notice that our B1C1 range for North America takes advantage of two sets of spectrum space within the 600 MHz band, as designated by the FCC auction. The 600 MHz band is made up of the following four parts:

- Guard Band (614-617 MHz)
- Downlink Band (617-652 MHz)
- Duplex Gap (652-663 MHz)
- Uplink Band (663-698 MHz)

Wireless devices in North America are limited to the Guard Band (614-617 MHz) and Duplex Gap (652-663 MHz).


The Guard Band consists of:

- 614-616 MHz: 2 MHz (unlicensed operators)
- 616-617 MHz: 1 MHz buffer (unavailable for use)

The Duplex Gap consists of:

- 652-653 MHz: 1 MHz buffer (unavailable for use)
- 653-657 MHz: 4 MHz (licensed operators only)
- 657-663 MHz: 6 MHz (unlicensed and WSDs)

Power is limited to 20mW for wireless microphones used in this part of the spectrum.

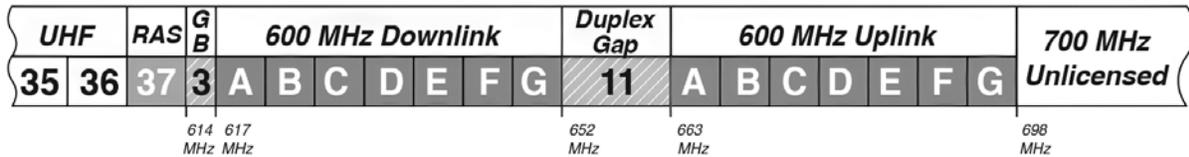

Battery Installation

The battery compartment and door catch are designed for simple and quick battery changes, yet prevent the door from being opened accidentally. Press both release catches inward to open.


Insert battery into compartment, contact end first. Line the contacts on the battery up with the contacts on the unit, then press the back end of the battery into compartment.



CAUTION: Use only the Lectrosonics LB50 battery and Lectrosonics battery chargers.

WARNING: Risk of fire or explosion if the battery is replaced by an incorrect type.

Controls and Functions

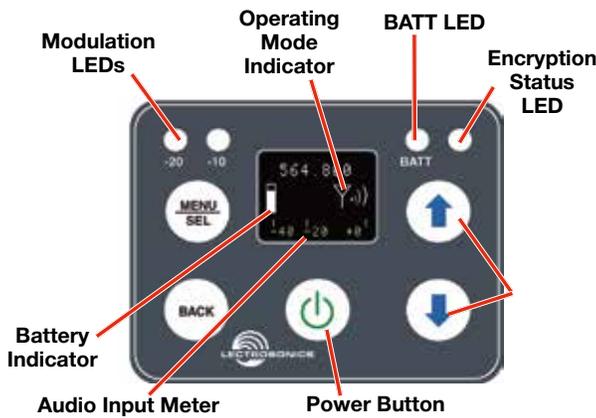

Modulation LEDs

Proper input gain adjustment is critical to ensure the best audio quality. Two bicolor LEDs will glow either red or green to accurately indicate modulation levels. The input circuitry includes a wide range DSP controlled limiter to prevent distortion at high input levels.

It is important to set the gain (audio level) high enough to achieve full modulation during louder peaks in the audio. The limiter can handle over 30 dB of level above full modulation, so with an optimum setting, the LEDs will flash red during use. If the LEDs never flash red, the gain is too low. In the table below, +0 dB indicates full modulation. See the **Adjusting Input Gain** section for additional information.

Signal Level	-20 LED	-10 LED
Less than -20 dB	● Off	● Off
-20 dB to -10 dB	● Green	● Off
-10 dB to +0 dB	● Green	● Green
+0 dB to +10 dB	● Red	● Green
Greater than +10 db	● Red	● Red

OLED Screen

The display is a matrix OLED with screens for adjusting various modes and options. The transmitter can be powered up with or without the RF output turned on. A brief press on the power button turns the unit on in a Standby Mode with the output turned off to allow adjustments to be made without interfering with other wireless systems in the vicinity.

BATT LED and Battery Indicator

The battery LED glows green when the battery is good, and the battery icon is solid and steady. The LED color changes to red when there is limited operating time remaining. When the battery is extremely low and the unit is about to turn off, the LED will blink, a few minutes before the unit powers itself down.

The exact point at which the LED turns red will vary with temperature and current drain. The LED is intended to simply catch your attention, not to be an exact indicator of remaining time.

The LED next to the BATT LED (Encryption Status) will glow blue if the unit is transmitting and has a valid encryption key.

MENU/SEL Button

The **MENU/SEL** button is used to access the MENU tree. The ⬆ and ⬇ arrows allow you to scroll through the list. Pressing **MENU/SEL** again allows you to access that selection's submenu. Pressing the **BACK** button returns you to the previous screen.

Power Button

Turns the unit on and off. A brief press turns power on in a Standby Mode to make settings without interfering with other wireless systems in the vicinity. Pressing and holding the button until a bar on the display completes a sequence turns the power on with the RF output turned on. Pressing and holding for the duration of a bar sequence turns the unit off.

Audio Input Meter

This shows the dB signal level, against a scale of -40 to +0. A small box with the letter "L" will appear at the far right when the audio signal goes into limiting.

UP and DOWN Arrow Buttons

The ⬆ and ⬇ arrow buttons are used to select the values on the various setup screens and to lock out the control panel.

Encryption Status LCD/LED Indicator Modes

- **StandBy:** Blue LED is OFF and Operating Mode Indicator icon has a line through it
- **Missing/Wrong Key:** LED is FLASHING when unit is transmitting, along with <-KEY?-> flashing below the Operating Mode Indicator.
- **Transmitting:** Blue Light is steadily ON when key is valid.



Turning LEDs ON and OFF (Shortcut)



From the main “home” screen, the arrow keys also turn the LEDs on and off. With no other button pressed, the  arrow turns the LEDs on and the  arrow turns them off. They can also be turned off or set to constantly stay on via the Set Up menu (see page 15).



The USB port, which is used for firmware updates, is located inside the battery compartment. When connected, the unit is powered from the USB source.

Connectors and USB Port

The housing is machined out of solid aluminum alloy for a rugged, lightweight assembly.

The antenna attaches via SMA connector. The IR port is capped with a translucent window to broaden the reception angle. The input jack is a rugged, watertight 3-pin connector with a threaded locking sleeve.



Battery door release tabs



Dock charging contacts

The opposite end of the transmitter contains the battery door latches and release tabs, along with the dock charging contacts.

Attaching and Removing the Microphone

Align the ridges on the plug with the grooves in the jack and insert the plug.



SMA Connector

IR window

Input Jack



The battery door has a Gore-Tex® sealed vent to allow air pressure to escape while blocking moisture ingress.


Slide the threaded sleeve onto the jack and rotate it clockwise to tighten it.

* Gore-Tex is a registered trademark of W. L. Gore and Associates

Operating Instructions

Powering On in Operating Mode

Press and hold the Power Button  for several seconds while “Hold for RF” appears and a bar indicator on the LCD progresses across the screen, returning to the Main Screen.

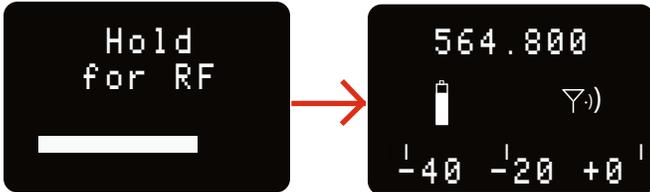

When you release the button, the unit will be operational with the RF output turned on and the Main Window displayed.

Powering On in Standby Mode

A brief press of the Power Button , releasing it before the progress bar is complete, will turn the unit on with the RF output turned off. The LCD will display a reminder that the RF output of the transmitter is turned off. **Standby Mode means no transmission.**



In this Standby Mode the frequency can be browsed to make adjustments without the risk of interfering with other wireless systems nearby.

After adjustments are made, press the Power Button again to turn the unit off.

Encryption Key Missing

A blinking <-KEY?-> below next to the Operating Mode Indicator shows that the Encryption Key is missing. Refer to page 14 for instructions on setting the Encryption Key.



The DSSM ships with the key type set as “Universal” and will work right away with any receiver also set to Universal Key Type.

Powering Off

Holding the Power Button  in and waiting for the bar counter to decrease fully will turn the power off.



If the power button is released before the countdown is completed, the unit will remain turned on and the LCD will return to the same screen or menu that was displayed previously.

Setup Steps

The top level menus are accessed by powering the unit on, then pressing **MENU/SEL**. Refer to the **Setup Screens** section for details of each setup parameter.

The following list outlines the steps necessary to set up the transmitter for normal use.


- 1) Install a charged Lectrosonics LB-50 battery or retrieve the charged unit from the charging dock.
- 2) Set the compatibility mode to match the receiver to be used by pressing **MENU/SEL**, then scrolling to **COMPAT** and pressing **MENU/SEL** again to choose either D2 or HDM.
- 3) Adjust the frequency to match the receiver by using IR sync or pressing **MENU/SEL**, then XMIT, then **FREQ**. Use the arrow buttons to scroll through the first set of digits, then pressing **MENU/SEL** to choose and go to the next set of digits. Press **MENU/SEL** choose.

The frequency is normally determined using the receiver to identify one within clear operating spectrum. Refer to the receiver instructions for details on using features such as scanning.

- 4) Connect the microphone or audio source to be used. Select the correct input configuration.
- 5) Adjust the input gain. Refer to the **Adjusting the Input Gain** section on the following page for instructions.
- 6) Turn on the receiver and verify that solid RF and audio signals are present (see receiver manual).

Locking the Controls

The controls can be locked by going to **MENU**, then **SETUP**. Use the arrow button to scroll down to **Locked?** Use the **UP** and **DOWN** arrows to choose, then select your choice by pressing **MENU/SEL**.

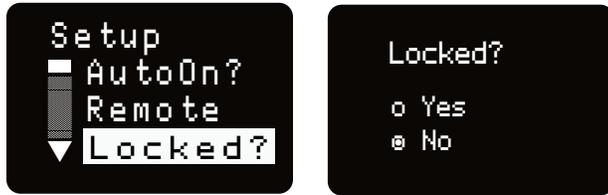

NOTE: If the unit is Locked, you will need to unlock it to turn the power off. This setting prevents accidentally turning off the power when in use.

- 5) Once the audio gain has been set, the signal can be sent through the sound system for overall level adjustments, monitor settings, etc.
- 6) If the audio output level of the receiver is too high or low, use only the controls on the receiver to make adjustments. Unless the microphone or its position changes, or a different instrument is being used, leave the transmitter gain adjustment set according to these instructions. Use the audio output level control on the receiver to make adjustments for the desired level being delivered to the connected mixer, recorder, etc.

Adjusting the Input Gain

The two bicolor Modulation LEDs on the control panel provide a visual indication of the audio signal level entering the transmitter. The LEDs will glow either red or green to indicate modulation levels as shown in the following table:

Signal Level	-20 LED	-10 LED
Less than -20 dB	● Off	● Off
-20 dB to -10 dB	● Green	● Off
-10 dB to +0 dB	● Green	● Green
+0 dB to +10 dB	● Red	● Green
Greater than +10 dB	● Red	● Red

NOTE: Full modulation is achieved at 0 dB, when the “-20” LED first turns red. The limiter can cleanly handle peaks up to 30 dB above this point.

It is best to go through the following procedure with the transmitter in the standby mode so that no audio will enter the sound system or recorder during adjustment.

- 1) With a charged battery in the transmitter, power the unit on.
- 2) Press the **MENU/SEL** button, then press **MENU/SEL** again to choose **INPUT**. Press once more to choose **GAIN**.
- 3) Prepare the signal source. Position a microphone the way it will be used in actual operation and have the user speak or sing at the loudest level that occur during use, or set the output level of the instrument or audio device to the maximum level that will be used.
- 4) Use the **⬆** and **⬇** arrow buttons to adjust the gain until the **-10 dB** glows green and the **-20 dB** LED starts to flicker red during the loudest peaks in the audio.

Menu Map

Input

Gain Use arrow buttons to increase or decrease gain
 to select and return

Rolloff Scroll options with arrow buttons
 to select and return

InpCfg Scroll options with arrow buttons
 to select custom settings

Input Config. options are Instr, PSA, COS-11, 0th Lav, Line In, DPA, MKE 2, Dynamic, B6, M152, Custom, and Line In

Xmit

Freq. Use arrow buttons to increase or decrease operating frequency or select tuning group
 to select MHz, KHz or group

TxPower Scroll option with arrow buttons
 to select and return

Rf On? Toggle option with arrow buttons
 to select and return

TxPower options are 10 or 35 mW (2mW in HD mode)

Compat

Compat Toggle option with arrow buttons
 to select and return

IR & Keys

Send Freq Use Up or Down arrows to initiate sync
 to select and return

Send All Use Up or Down arrows to initiate sync
 to select and return

Get Freq Use Up or Down arrows to initiate sync
to select and return


Get All Use Up or Down arrows to initiate sync
to select and return

Key Type Scroll option with arrow buttons
 to select and return

WipeKey? Toggle option with arrow buttons
 to select and return

Key Type options are Universal, Standard, Shared, and Volatile.


This menu choice is only available if Standard, Shared, or Volatile keys are used.

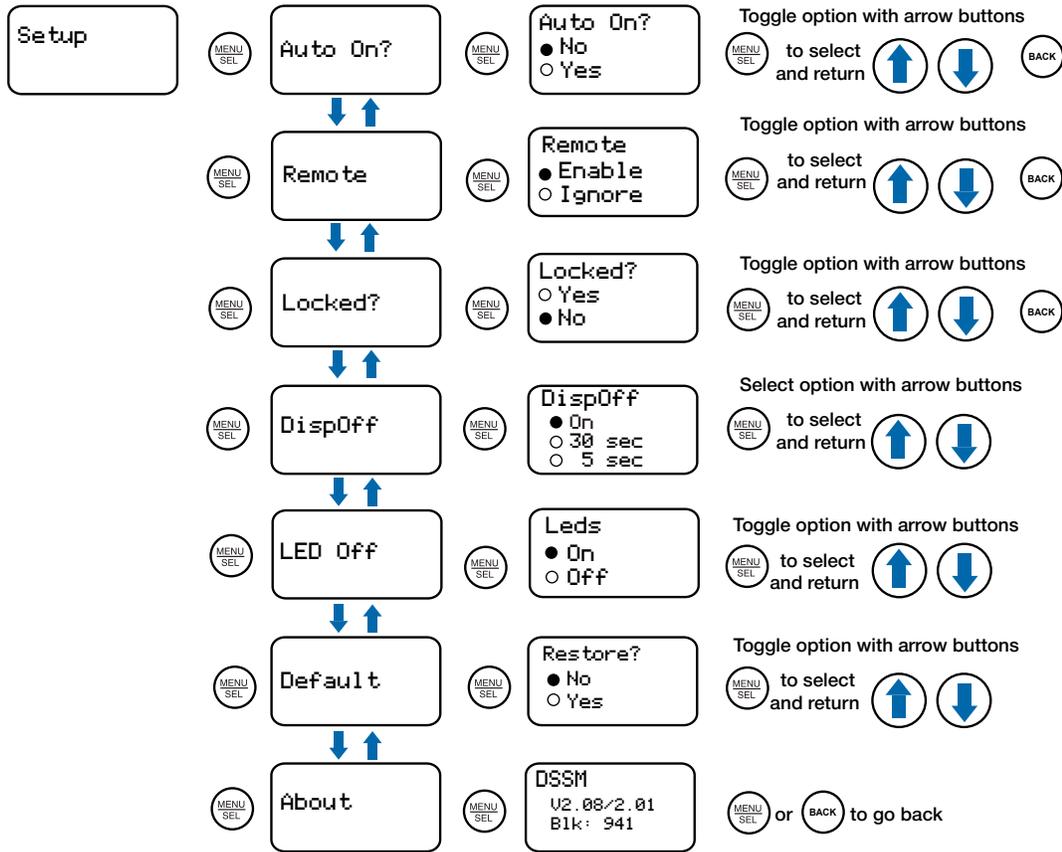

Menu Screen Details

Top Menu


From the Home screen, pressing **MENU/SEL** will access the Top Menu. The Top Menu allows the user to access the various sub-menus to change settings on the unit.

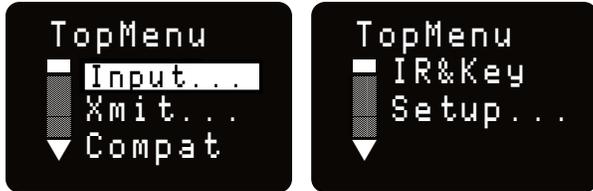

- 3) Prepare the signal source. Position a microphone the way it will be used in actual operation and have the user speak or sing at the loudest level that will occur during use, or set the output level of the instrument or audio device to the maximum level that will be used.
- 4) Use the \uparrow and \downarrow arrow buttons to adjust the gain until the **-10 dB** glows green and the **-20 dB** LED starts to flicker red during the loudest peaks in the audio.
- 5) Once the audio gain has been set, the signal can be sent through the sound system for overall level adjustments, monitor settings, etc.
- 6) If the audio output level of the receiver is too high or low, use only the controls on the receiver to make adjustments. Always leave the transmitter gain adjustment set according to these instructions, and do not change it to adjust the audio output level of the receiver.

Input Menu

From the TopMenu, use the \uparrow and \downarrow arrow buttons to highlight **INPUT** and press **MENU/SEL**.

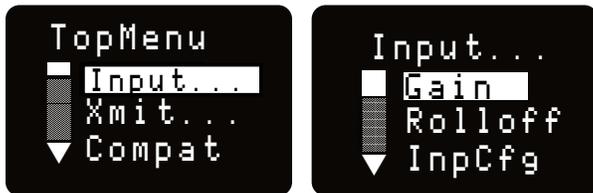

Selecting the Low Frequency Roll-off

It is possible that the low frequency roll-off point could affect the gain setting, so it's generally good practice to make this adjustment before adjusting the input gain.



Adjusting the Input Gain

The two bicolor Modulation LEDs on the control panel provide a visual indication of the audio signal level entering the transmitter. The LEDs will glow either red or green to indicate modulation levels as shown in the following table.

Signal Level	-20 LED	-10 LED
Less than -20 dB	● Off	● Off
-20 dB to -10 dB	● Green	● Off
-10 dB to +0 dB	● Green	● Green
+0 dB to +10 dB	● Red	● Green
Greater than +10 dB	● Red	● Red

NOTE: Full modulation is achieved at 0 dB, when the “-20” LED first turns red. The limiter can cleanly handle peaks up to 30 dB above this point.

It is best to go through the following procedure with the transmitter in the standby mode so that no audio will enter the sound system or recorder during adjustment.

- 1) With fresh LB50 batteries in the transmitter, power the unit on.
- 2) Navigate to the Gain setup screen.



The -3 dB down point for the roll-off can be set to:

- 35 Hz
- 50 Hz
- 70 Hz
- 100 Hz
- 120 Hz
- 150 Hz

The roll-off is often adjusted by ear while monitoring the audio to minimize low frequency noise or rumble while leaving the desired sound unaffected.

Selecting Mic/Audio Input Configuration

Audio input can be selected by using the \uparrow and \downarrow arrow buttons to select the **InpCfg** from the Input Menu and pressing **MENU/SEL** to select your choice.



- Instr
- COS-11
- Line In
- MKE 2
- B6
- Custom
- PSA
- Oth Lav
- DPA
- Dynamic
- M152

The two types of high levels signals that can be used with the transmitter are:

- **Line** Used with line level outputs from recorders, mixers and other audio devices.
- **Instr:** (instrument) A special type of high impedance input with an active preamp for an optimal match with instrument pickups.

The Custom setting allows for configuring of inputs not in the menu:



Use the arrow buttons to scroll through the available choices and use **MENU/SEL** to choose:

- Instr. (Pos or Neg Polarity)
- Line In (Pos or Neg Polarity)
- MicHiZ (0, 2 or 4V Bias Voltage; Pos or Neg Polarity)
- MicLoZ (0, 2 or 4VBias Voltage; Pos or Neg Polarity)

Option	Description	Bias	Impedence	Polarity
Instr	For Line Level Input	No Bias	Instrument	Positive
COS-11	Phase reversed; use for Sanken Cos-11, M152 and similar mics	4V	MicLowZ	Negative
LineIn	For Line Level Input	No Bias	Line In	Positive
MKE2	For Sennheiser MKE2 and similar mics	4V	MicLowZ	Positive
B6	Countryman B6 and similar mics	2V	MicLowZ	Positive
PSA	For Point Source Audio and similar mics	4V	MicLowZ	Negative
Oth Lav	Same as COS but audio phase not reversed	4V	MicLowZ	Positive
DPA	For DPA and similar mics	4V	MicLowZ	Negative
Dynamic	For dynamic mics	No Bias	MicLowZ	Positive
M152	Same as Oth Lav; for easy selection of Lectrosonics 152 and similar	4V	MicLowZ	Positive

Xmit Menu

Use the \uparrow and \downarrow arrow buttons to select the Transmit Menu from the TopMenu.

Selecting Frequency

The setup screen for frequency selection offers several ways to browse the available frequencies.



Press **MENU/SEL** and use the arrow buttons to select one of three fields to adjust: MHz, KHz and Group.

Pressing the \uparrow and \downarrow arrows changes values. The MHz frequency will change in 1 MHz steps, the KHz frequency will change in 25 KHz steps.

The GRP field allows selection of one of four user programmable frequency groups (Groups U through X), or the choice to not use groups at all. In the programmable frequency groups, up to 32 frequencies can be programmed per group. Refer to the receiver manual for group tuning information.

Use the arrow keys to cycle through the groups. Once the desired group is selected, press the **MENU/SEL** button to move the cursor back to the operating frequency. If the previously tuned frequency is not in the selected group, the number will flash. Now, use the \uparrow and \downarrow arrow buttons to scroll and select frequencies within the chosen group. These frequency numbers will not flash. Once the desired group frequency is chosen, Press **BACK** to return to the XMIT menu and once again to return to the home screen.

Setting Transmitter Output Power

Use the \uparrow and \downarrow arrow buttons to select the Transmit Menu from the TopMenu.

In D2 Compat Mode, the output power can be set to 10 or 35 mW. Use the arrow buttons to scroll between and **MENU/SEL** to choose. In HDM Compat Mode, the RF power is set to 2 mW.




RF On?

RF transmission can be turned on or off using the \uparrow and \downarrow arrow buttons.



Compat Menu

Selecting the Compatibility Mode

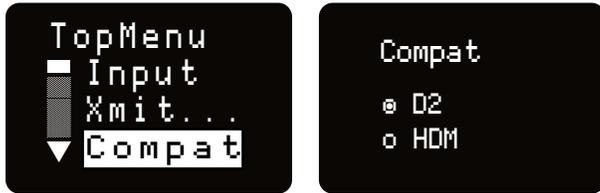

Use the **UP** and **DOWN** arrow buttons to select the desired mode, then press the **BACK** button twice to return to the Main Window. Compatibility modes are as follows:

- Standard Mono Digital D2
- High Density Mode HDM

HDM Mode (High Density Transmission)

This special transmitting mode and associated low RF power of 2mW allows the user to “stack” many units into a very small area of the spectrum. Standard, ETSI-compliant RF carriers take up about 200 kHz of occupied bandwidth, while HDM takes up about half of that, or 100 kHz, and allows for much tighter channel spacing, without concern for frequency coordination.

IR&Key Menu

SendFreq

Press **MENU/SEL** to send the Frequency to another transmitter or receiver via the IR port.



SendAll

Press **MENU/SEL** to send information to a paired receiver: Frequency, Transmitter Name, and Talkback Enabled to another transmitter or receiver via the IR port.



NOTE: SendAll does not send Encryption Key. This must be done separately.

GetFreq

Press **MENU/SEL** to get Frequency information from another transmitter or receiver via the IR port.



GetAll

Press **MENU/SEL** to get information from a paired receiver: Frequency, Transmitter Name, Talkback Enabled, and Compatibility Mode via the IR port.



KeyType

The DSSM receives an encryption key via the IR port from a key generating receiver. Begin by selecting a key type in the receiver and generating a new key (key type is labeled KEY POLICY in the DSQD receiver). Set the matching KEY TYPE in the DSSM and transfer the key from the receiver (SYNC KEY) to the DSSM via the IR ports. A confirmation message will display on the receiver display if the transfer is successful. The transmitted audio will then be encrypted and can only be listened to if the receiver has the matching encryption key.



The DSSM has four options for encryption keys:

- **Universal:** This is the most convenient and basic option available, and the default setting on all Lectrosonics D2 digital units. All encryption-capable Lectrosonics transmitters and receivers contain the Universal key. A unique key does not have to be generated. Simply set the Lectrosonics encryption-capable transmitters and receivers to Universal key type, and the encryption is in place. This allows for convenient encryption amongst multiple transmitters and receivers, but is not as secure as creating a unique key.

- **Shared:** This key policy is designed for sports coverage and similar applications where a unique key provides enhanced security, but multiple transmitters and receivers can share the same key. Once generated by the receiver, the key can be transferred via IR to transmitters or additional receivers.
- **Standard:** This key policy provides excellent security, second only to the Volatile key policy. Once a unique key is created in the receiver, it can be transferred via IR only to transmitters, but not to other receivers. The receiver tracks the number of times the key is transferred. Once a Standard key has been transferred 256 times, an alert will indicate that a new key must be created.
- **Volatile** This is the most robust key policy available. After a unique key is created, it can be transferred only to transmitters, not other receivers. If a transmitter is powered off, it must have the key sent to it again from the receiver. If the receiver is powered off, a new key must be generated and sent to the transmitters. In encryption terms, this is the “one time use” key management policy.

WipeKey

This menu item is only available if Key Type is set to Standard, Shared or Volatile. Select Yes to clear the current key.



SetUp Menu


AutoOn

Press **MENU/SEL** to toggle the AutoOn feature on or off. When enabled, the transmitter will turn on to Transmit mode when a battery is replaced while the unit is running.



Remote

Press **MENU/SEL** to toggle the remote “dweedle tone” feature on or off. When enabled, the transmitter will respond to tone commands.

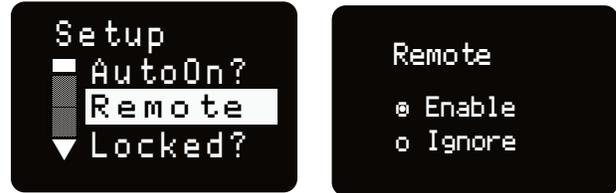

Locking/Unlocking Changes to Settings

Changes to the settings can be locked in this menu.




When changes are locked, several controls and actions can still be used:

- Settings can still be unlocked
- Menus can still be browsed
- When locked, **POWER CAN ONLY BE TURNED OFF** by removing the batteries.


DispOff

Press **MENU/SEL** to toggle the DisplayOff feature between 5 and 30 seconds after the last time a button is pressed, or set to constantly stay on.

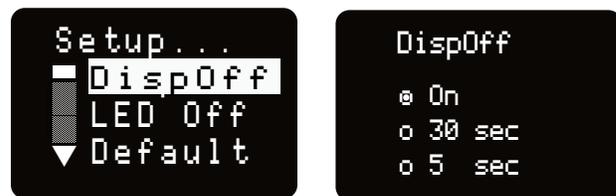


LED Off

From the main menu screen, a quick press of the the arrow button turns the control panel LEDs on. A quick press of the arrow button turns them off. The buttons will be disabled if the LOCKED option is selected in the Power Button menu.

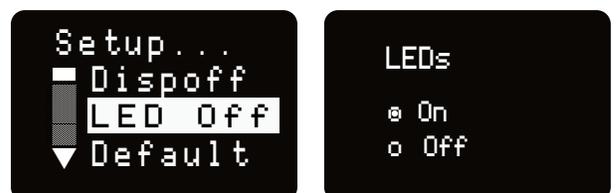


Default

Press **MENU/SEL** to restore the Default (factory) settings.

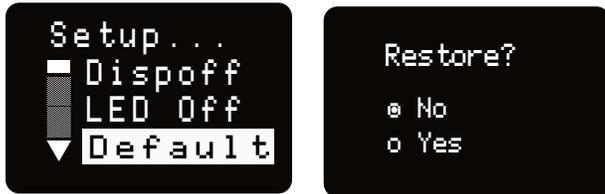


About

Press **MENU/SEL** to display the model, the firmware version, the software version and the band/block.

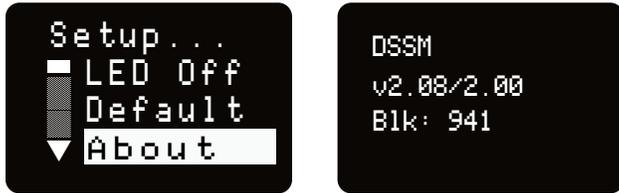

Microphone Wiring

Looking into the 3 pin Lemo mic connector from the outside of the transmitter, the pin centered in the two guide slots is pin 1 (ground). Pin 2 is a 1k resistor to ground. Pin 3 is the audio/bias connection for two-wire microphones and line inputs.



- Pin 1 - ground
- Pin 2 - 1k source load to ground
- Pin 3 - servo input

Voltages, polarity, impedance and line level for all signal sources are selected by menus. Menu selections include presets for popular microphones, and a sub-menu for manual setup. Refer to the section entitled **Setup Screens** on the previous page for details.

Two-wire electret lavalier:

- Pin 1 - Ground (shield)
- Pin 3 - Audio and Bias

Sanken COS-11 lavalier

Recommended Wiring:

- Pin 1 - Shield (ground)
- Pin 2 - White (source load)
- Pin 3 - Black (bias and audio)

NOTE: The COS-11 can also be wired in a two-wire configuration. Contact Plus24/Sanken for details.

The Sanken CUB-01 is not supported.

Line and Instrument Input Wiring and Use

Pin Configuration:

- Pin 1: Shield (ground)
- Pin 2: Audio

Transmitter Settings:



The gain setting can be adjusted as needed for the specific input level used.

Selecting Mic/Audio Input Configuration

Refer to Page 12 for detailed information on configuring Line and Instrument level inputs.

IR Sync

An IR (infrared) link between an associated receiver and the transmitter can be used to shorten setup time and ensure that the correct settings in the transmitter are made. The window on the top panel of the transmitter is the port used for the IR link. The receiver is normally used to identify a clear operating frequency. Once step size, frequency and compatibility mode are set in the receiver, the settings can be sent to the transmitter via this IR link.

Place the transmitter close to the IR enabled receiver with the ports facing each other a few inches apart. Send the settings with the trigger on the receiver. If the settings are successfully transferred, a confirmation message will appear on the transmitter and receiver displays.

NOTE: If a mismatch exists between the receiver and transmitter, an error message will appear on the units.

Reversible Belt Clip

The belt clip may be removed or reoriented (to point the antenna up or down) by carefully lifting it out and off of the housing, with the battery door open. Pull the one side of the wire out of the grooved hole as shown, then upward to remove. Repeat for the opposite side.



The wire rests in a small groove while placed into the mounting hole.




Whip Antennas

Because the transmitter tunes across such a broad frequency range, it is best to use the appropriate antenna for maximum operation. Two antennas are included with the transmitter, and are shipped from the factory pre-cut and fully assembled with a 50 Ohm SMA connector.

Each antenna covers three blocks. Use the chart below to determine which antenna best fits your needs.

Band	Block	Frequency Range MHz	Cap Color	Antenna
A1	470	470.100 - 495.600	Black	AMM19
	19	486.400 - 511.900	Black	AMM19
	20	512.000 - 537.500	Black	AMM19
B1	21	537.600 - 563.100	Brown	AMM22
	22	563.200 - 588.700	Red	AMM22
	23	588.800 - 614.300	Orange	AMM22
C1	24	614.400 - 639.900	Yellow	AMM24
	25	640.000 - 665.500	Blue	AMM24
	26	665.600 - 691.100	Green	AMM24
C2	25	640.000 - 665.500	Green	AMM24
	26	665.600 - 691.100	Blue	AMM24
	27	691.200 - 716.700	Pink	AMM24
	941	941.525-959.825	Black	AMM944

NOTE: 941 units use 944 antennas

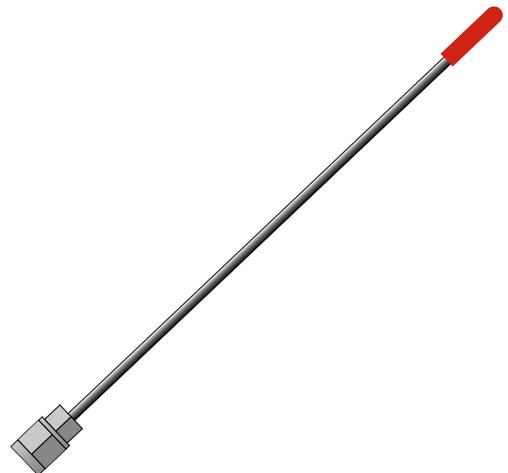

LectroRM

By New Endian LLC

LectroRM is a 3rd party mobile application for iOS and Android smart phone operating systems. Its purpose is to make changes to the settings on select Lectrosonics transmitters by delivering encoded audio tones to the microphone attached to the transmitter. When the tone enters the transmitter, it is decoded to make a change to a variety of different settings such as input gain, frequency and a number of others.

The app was released by New Endian, LLC in September 2011. The app is available for download and sells for \$25 on the Apple App Store and Google Play Store.

The settings and values that can be changed vary from one transmitter model to another. The complete list of available tones in the app is as follows:

- Input gain
- Frequency
- Sleep Mode
- Panel LOCK/UNLOCK
- RF output power
- Low frequency audio roll-off
- LEDs ON/OFF


The user interface involves selecting the audio sequence related to the desired change. Each version has an interface for selecting the desired setting and the desired option for that setting. Each version also has a mechanism to prevent accidental activation of the tone.

iOS



The iPhone version keeps each available setting on a separate page with the list of options for that setting. On iOS, the “Activate” toggle switch must be enabled to show the button which will then activate the tone. The iOS version’s default orientation is upside-down but can be configured to orient right-side up. The purpose for this is to orient the phone’s speaker, which is at the bottom of the device, closer to the transmitter microphone.

Android

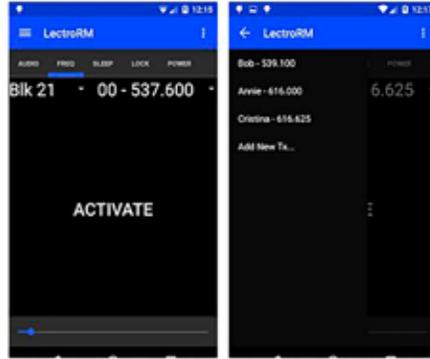

The Android version keeps all settings on the same page and allows the user to toggle between the activation buttons for each setting. The activation button must be pressed and held to activate the tone. The Android version also allows users to keep a configurable list of full sets of settings.

Remote Control and Activation

Remote control signals (“dweedle tones”) may be used to control the transmitter. The tones are played back into the microphone to avoid the need to reach and handle the transmitter when making changes to the adjustments and settings.

For a transmitter to respond to remote control audio tones, the transmitter must meet certain requirements:

- The transmitter must be turned on.
- The transmitter microphone must be within range.
- The remote control function must be enabled on the transmitter. See page 15.

Please be aware this app is not a Lectrosonics product. It is privately owned and operated by New Endian LLC, www.newendian.com.

Firmware Update


Firmware updates are made with Wireless Designer software and a file downloaded from the web site and the DSSM connected via USB.

Firmware files are located at <https://lectrosonics.com/firmware.html> and Wireless Designer software can be downloaded for Mac or Windows here <https://lectrosonics.com/wireless-designer.html>.

The USB port on the transmitter requires a micro-B male plug on the connecting cable. The other end of the cable would normally be a USB A-Type male connector to fit the most common type of USB jack used on computers. Our part number for this cable is 21926.

Step 1:

Open the DSSM battery compartment and remove the battery. Connect your computer to the DSSM using the USB cable. The transmitter will automatically power on into Update mode.



Step 2:

Start Wireless Designer and under the “Connect (Live)” menu, scroll down to Update Firmware, and in the D² sub-menu, click on DSSM.



Step 3:

Follow the on-screen instructions to choose the update file, check to see if an update is needed, and initiate the update process. When finished, unplug the unit, replace the battery, and power on to RF Off mode, and check the firmware version in Setup>About to verify the update.



Supplied Accessories

AMM19

Whip Antenna with Standard SMA Connector. Block 19; included with A1B1 variant only.

AMM22

Whip antenna with Standard SMA Connector. Included with A1B1 and B1C1 variants.

AMM25

Whip antenna with Standard SMA Connector. Included with B1C1 variants only.

AMM944

Whip antenna with Standard SMA Connector. Included with 941 variants only.



Cordura Pouch

P/N 35939 zippered, padded; 4 x 6 x1 inches



Reversible Wire Belt Clip

Belt clip for DSSM; black wire. Reorder with P/N 27332.



Rechargeable battery

P/N 40106-1 LB-50 3.6V lithium-ion battery pack



Optional Accessories

CHSDSSM Dock Charging System

Charger for two Lectrosonics LB-50 batteries; includes charger and short USB cable. Use P/N 40117.

Available with transmitter as a kit. Use P/N **ZS-DSSM-A1B1-WITH-CHARGER**



DCR5/9AU

AC-DC power supply, for CHSDSSM



SSMCVR

Silicone cover protects from moisture and dust



Specifications

Operating Frequencies:

DDSSM - A1B1	470.100 - 607.950
DSSM/E01-A1B1:	470.100 - 614.375
DSSM-B1C1 (US)	537.600 - 607.950 614.400 - 615.950 653.050 - 662.950
DSSM/E01-B1C1:	537.600 - 691.175
DSSM/E07-941:	941.525 - 951.575 953.025 - 956.225 956.475 - 959.825

NOTE: It is the user's responsibility to select the approved frequencies for the region where the transmitter is operating.

Frequency Selection Steps:	25 kHz
RF Power output:	Selectable; 10, 35 mW or 2mW (HD mode)
Compatibility Modes:	HDM or D2 (all models)
Frequency Stability:	± 0.002%
Spurious radiation:	Compliant with ETSI EN 300 422-1
Equivalent input noise:	-120 dBV (A-weighted)
Input level:	Nominal 2 mV to 300 mV, before limiting. Greater than 1V maximum, with limiting.
Input impedance:	<ul style="list-style-type: none"> Mic: 300 or 4.5 k ohm; selectable Line: 900 ohm Instrument: 1 M ohm
Input limiter:	DSP controlled, dual envelope "soft" limiter with greater than 30 dB range
Gain control range:	-7 to +44 dB; digital control, 1 db steps
Modulation indicators:	Dual bicolor LEDs indicate modulation of -20, -10, 0 and +10 dB referenced to full modulation

Audio Performance:

Frequency Response:	35-20 kHz; 35-15 kHz (HDM compat mode)
Low frequency roll-off:	Selectable; 35, 50, 70, 100, 120, 150 Hz
THD:	0.2% (typical)
Controls:	Front panel membrane switches with OLED interface for power on/off and all setup and configuration controls
Audio Input Jack:	Subminiature; locking 3 pin
Antenna:	SMA connector; coated, flexible wire, length by frequency band
Battery: (included)	Lithium-ion 3.6 V 1000 mAh LB50 battery pack
Battery Life:	6 hours per charge @ 35 mW
Weight:	3.5 ounces (100 grams) including lithium battery pack
Dimensions (housing):	2.59 x 1.9 x .70 in. (66 x 49 x 17 mm)
Emission Designator:	110KG1E (HD mode); 170KG1E (D2 mode)

For body worn operation, this transmitter model has been tested and meets the FCC RF exposure guidelines when used with the Lectrosonics accessories supplied or designated for this product. Use of other accessories may not ensure compliance with FCC RF exposure guidelines. Contact Lectrosonics if you have any questions or need more information about RF exposure using this product..

This device complies with FCC radiation exposure limits as set forth for an uncontrolled environment. This device should be installed and operated so that its antenna(s) are not co-located or operating in conjunction with any other antenna or transmitter.

This device complies with ISED Canada radiation exposure limits as set forth for a controlled "professional" use only.

Cet appareil est conforme avec les normes d'Industrie Canada concernant les limites d'exposition aux radiations pour un usage professionnel contrôlé seulement.



Specifications subject to change without notice.

Troubleshooting

It is important that you follow these steps in the sequence listed.

Symptom:

Transmitter Battery LED off when Power Switch “ON”

No Transmitter Modulation LEDs when Signal Should be Present

Receiver Indicates RF But No Audio

Receiver RF Indicator Off

No Sound (Or Low Sound Level), Receiver Indicates Proper Audio Modulation

Distorted Sound

Wind Noise or Breath “Pops”

Hiss and Noise -- Audible Dropouts

Excessive Feedback (With Microphone)

Possible Cause:

1. Batteries are inserted incorrectly.
 2. Batteries are low or dead.
1. Gain control turned all the way down.
 2. Batteries are inserted incorrectly. Check power LED.
 3. Mic capsule is damaged or malfunctioning.
 4. Mic cable damaged or miswired.
 5. Instrument Cable damaged or not plugged in.
 6. Musical instrument output level set too low.
1. Audio source or cable connected to transmitter is defective. Try using an alternate source or cable.
 2. Make sure the compatibility mode is the same on transmitter and receiver.
 3. Ensure musical instrument volume control is not set to minimum.
 4. Check for correct encryption key type is selected.
1. Ensure that the transmitter and receiver are set to the same frequency.
 2. Transmitter not turned on, or battery is dead.
 3. Receiver antenna missing or improperly positioned.
 4. Operating distance is too great.
 5. Transmitter may be set to the Standby Mode. See page 8.
1. Receiver output level set too low.
 2. Receiver output is disconnected; cable is defective or miswired.
 3. Sound system or recorder input is turned down or not enabled.
1. Transmitter gain (audio level) is too high. Check Modulation LEDs on transmitter and receiver while distortion is being heard.
 2. Receiver output level may be mismatched with the sound system or recorder input. Adjust output level on receiver to the correct level for the recorder, mixer or sound system.
 3. RF interference. Reset both transmitter and receiver to a clear channel. Use scanning function on receiver if available.
 4. Transmitter is at the edge of the useable range for that frequency.
1. Reposition microphone, or use a larger windscreen, or both.
 2. Omni-directional mics produce less wind noise and breath pops than directional types.
1. Receiver antenna missing or obstructed.
 2. Operating distance too great.
 3. RF interference. Reset both transmitter and receiver to a clear channel. Use scanning function on receiver if available.
 4. Microphone capsule picking up RF noise.
1. Transmitter gain (audio level) too high. Check gain adjustment and/or reduce receiver output level.
 2. Microphone too close to speaker system.
 3. Microphone is too far from user's mouth.

Service and Repair

If your system malfunctions, you should attempt to correct or isolate the trouble before concluding that the equipment needs repair. Make sure you have followed the setup procedure and operating instructions. Check the inter-connecting cables.

We strongly recommend that you **do not** try to repair the equipment yourself and **do not** have the local repair shop attempt anything other than the simplest repair. If the repair is more complicated than a broken wire or loose connection, send the unit to the factory for repair and service. Don't attempt to adjust any controls inside the units. Once set at the factory, the various controls and trimmers do not drift with age or vibration and never require readjustment. **There are no adjustments inside that will make a malfunctioning unit start working.**

LECTROSONICS' Service Department is equipped and staffed to quickly repair your equipment. In-warranty repairs are made at no charge in accordance with the terms of the warranty. Out-of-warranty repairs are charged at a modest flat rate plus parts and shipping. Since it takes almost as much time and effort to determine what is wrong as it does to make the repair, there is a charge for an exact quotation. We will be happy to quote approximate charges by phone for out-of-warranty repairs.

Returning Units for Repair

For timely service, please follow the steps below:

- A.** DO NOT return equipment to the factory for repair without first contacting us by email or by phone. We need to know the nature of the problem, the model number and the serial number of the equipment. We also need a phone number where you can be reached 8 A.M. to 4 P.M. (U.S. Mountain Standard Time).
- B.** After receiving your request, we will issue you a return authorization number (R.A.). This number will help speed your repair through our receiving and repair departments. The return authorization number must be clearly shown on the **outside** of the shipping container.
- C.** Pack the equipment carefully and ship to us, shipping costs prepaid. If necessary, we can provide you with the proper packing materials. UPS or FEDEX is usually the best way to ship the units. Heavy units should be "double-boxed" for safe transport.
- D.** We also strongly recommend that you insure the equipment, since we cannot be responsible for loss of or damage to equipment that you ship. Of course, we insure the equipment when we ship it back to you.

Lectrosonics USA:

Mailing address:

Lectrosonics, Inc.
PO Box 15900
Rio Rancho, NM 87174
USA

Web:

www.lectrosonics.com

Shipping address:

Lectrosonics, Inc.
561 Laser Rd., Suite 102
Rio Rancho, NM 87124
USA

E-mail:

service.repair@lectrosonics.com
sales@lectrosonics.com

Telephone:

+1 (505) 892-4501
(800) 821-1121 Toll-free US/Canada
Fax +1 (505) 892-6243

Lectrosonics Canada:

Mailing Address:

720 Spadina Avenue,
Suite 600
Toronto, Ontario M5S 2T9

Telephone:

+1 (416) 596-2202
(877) 753-2876 Toll-free Canada
(877) 7LECTRO
Fax (416) 596-6648

E-mail:

Sales: colinb@lectrosonics.com
Service: joeb@lectrosonics.com

Self-Help Options for Non-Urgent Concerns

Our Facebook groups and weblists are a wealth of knowledge for user questions and information. Refer to:

Lectrosonics General Facebook Group: <https://www.facebook.com/groups/69511015699>

D Squared, Venue 2 and Wireless Designer Group: <https://www.facebook.com/groups/104052953321109>

The Wire Lists: <https://lectrosonics.com/the-wire-lists.html>

LIMITED ONE YEAR WARRANTY

The equipment is warranted for one year from date of purchase against defects in materials or workmanship provided it was purchased from an authorized dealer. This warranty does not cover equipment which has been abused or damaged by careless handling or shipping. This warranty does not apply to used or demonstrator equipment.

Should any defect develop, Lectrosonics, Inc. will, at our option, repair or replace any defective parts without charge for either parts or labor. If Lectrosonics, Inc. cannot correct the defect in your equipment, it will be replaced at no charge with a similar new item. Lectrosonics, Inc. will pay for the cost of returning your equipment to you.

This warranty applies only to items returned to Lectrosonics, Inc. or an authorized dealer, shipping costs prepaid, within one year from the date of purchase.

This Limited Warranty is governed by the laws of the State of New Mexico. It states the entire liability of Lectrosonics Inc. and the entire remedy of the purchaser for any breach of warranty as outlined above. **NEITHER LECTROSONICS, INC. NOR ANYONE INVOLVED IN THE PRODUCTION OR DELIVERY OF THE EQUIPMENT SHALL BE LIABLE FOR ANY INDIRECT, SPECIAL, PUNITIVE, CONSEQUENTIAL, OR INCIDENTAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THIS EQUIPMENT EVEN IF LECTROSONICS, INC. HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. IN NO EVENT SHALL THE LIABILITY OF LECTROSONICS, INC. EXCEED THE PURCHASE PRICE OF ANY DEFECTIVE EQUIPMENT.**

This warranty gives you specific legal rights. You may have additional legal rights which vary from state to state.

