

SR Sleeve Mounting

TECHNICAL DATA

SRSLEEVE and SRHARDWARE

SRSLEEVE


This sleeve is supplied with Velcro swatches for mounting the SR Dual Receiver on a flat surface of camera, cart, rack, etc. The sleeve is sized and lined for a snug fit in a vertical or horizontal position.



Other mounting options are available using the SRHARDWARE KIT.

VERTICAL MOUNTING

To attach the right angle bracket, first insert and tighten the retaining pin (3/32 allen wrench provided) which keeps the bracket from rotating.

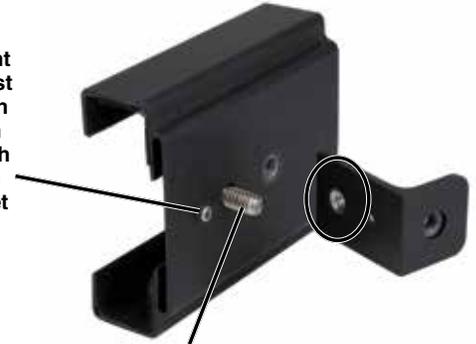

Insert Pan Head
part # 28873

SRHARDWARE KIT



Kit includes spare retaining pin

This optional adapter kit mounts the sleeve onto the shoe mount of a camera in either a vertical or horizontal orientation.




Thread the long phillips head screw through the sleeve and into the tension nut insert on the bracket.



1. The insert nut in the sleeve and right angle bracket is an elliptical tensioning type.

The sleeve can also be mounted directly onto the tripod socket on the camera.

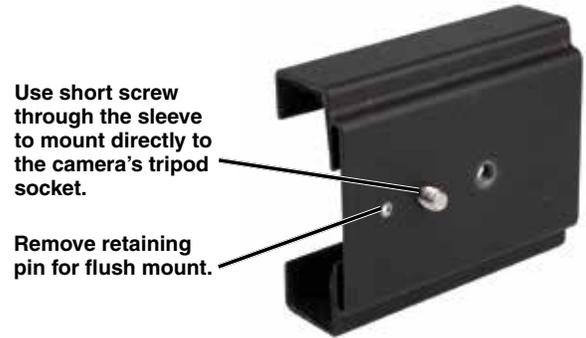

Use short screw through the sleeve to mount directly to the camera's tripod socket.

Remove retaining pin for flush mount.



2. Use a wrench to thread the stud in about 1 - 2 turns, then rotate it to orient the receiver control panel in the desired direction.



Sleeve mounted to SR with hardware.



The threads will not bottom out.

